


S7 SERIES LOW POWER SWITCHING AC POWER SUPPLY

MULTI-FUNCTION DISPLAY

Normal state: Output value display
Setup state: Setup value display



Max. 15V, 1.5AAC Output





AC POWER FREQUENCY ADJUST

Rotate: Frequency adjust (0 ~ 400Hz)
Press: Frequency preset (50Hz, 60Hz, 100Hz, 400Hz)



AC POWER VOLTAGE ADJUST

Rotate: Voltage adjust (1~15Vrms)
Press: Over current reset

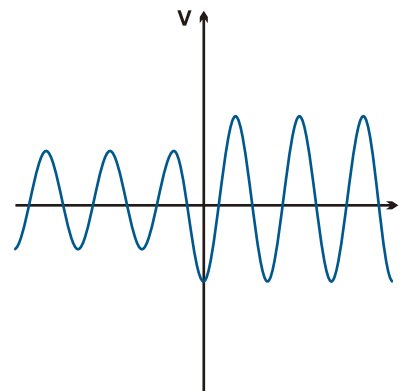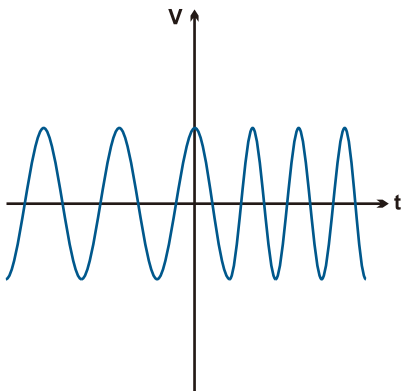

S7-1502A [AC ADJUSTABLE F & V] CE

Specifications

- .Output voltage: 1V~15Vrms
- .Output frequency: 0~100Hz (1Hz step)
100~400Hz (5Hz step)
50Hz, 60Hz, 100Hz, 400Hz
- .Output current: 1.5A
- .Line regulation: 1%
- .Load regulation: 1% @50Hz
- .Output accuracy: Voltage: 0.5% @50Hz
Frequency: 2% (<20Hz), 1% (20Hz~400Hz)
- .Input voltage: 85~265VAC 50/60Hz
- .Dimensions: 110(W)×75(H)×140(D)mm
- .Weight: 350g



S7-1502A

S7-1202A [AC 6 VOLTAGES] CE

Specifications

- .Output voltage: 2V, 4V, 6V, 8V, 10V, 12Vrms
- .Output current: 2A
- .Output frequency: 50Hz, 60Hz, line tracing
- .Output accuracy: Voltage: 0.5%
Frequency: 1%
- .Input voltage: 85~265VAC 50/60Hz
- .Dimensions: 110(W)×75(H)×140(D)mm
- .Weight: 350g



S7-1202A

S7-2401A [AC ADJUSTABLE VOLTAGE] CE

Specifications

- .Output voltage: 0~24Vrms
- .Output current: 1A
- .Output frequency: 50Hz, 60Hz, line tracing
- .Output accuracy: Voltage: 0.5%
Frequency: 1%
- .Input voltage: 85~265VAC 50/60Hz
- .Dimensions: 110(W)×75(H)×140(D)mm
- .Weight: 350g



S7-2401A

S7 SERIES LOW POWER SWITCHING DC POWER SUPPLY

S7-1201 [6 VOLTAGES]

Specifications

.Output voltage:	3V, 4.5V, 6V, 7.5V, 9V, 12V
.Output current:	1.5A
.Line regulation:	15mV
.Load regulation :	20mV
.Ripple & Noise:	1.5mVrms,5mVpp
.Output accuracy:	5%
.Input voltage:	85~265VAC 50/60Hz
.Dimensions:	110(W)×75(H)×140(D)mm
.Weight:	300g



S7-1201

S7-1501 [SYMMETRICAL VOLTAGE]

Specifications

.Output voltage:	±15V
.Output current:	1A
.Line regulation:	5mV
.Load regulation :	25mV
.Ripple & Noise:	1.8mVrms,5mVpp
.Output accuracy:	5%
.Input voltage:	85~265VAC 50/60Hz
.Dimensions:	110(W)×75(H)×140(D)mm
.Weight:	300g



S7-1501

S7-1502 [6 VOLTAGES]

Specifications

.Output voltage:	1.5V, 3V, 6V, 9V, 12V, 15V
.Output current:	2.0A
.Line regulation:	20mV
.Load regulation :	150mV
.Ripple & Noise:	15mVrms
.Output accuracy:	5%
.Input voltage:	85~265VAC 50/60Hz
.Dimensions:	110(W)×75(H)×140(D)mm
.Weight:	300g



S7-1502

S7-3001 [ADJUSTABLE VOLTAGE]

Specifications

.Output voltage:	0~30V
.Output current:	1A
.Line regulation:	15mV
.Load regulation :	100mV
.Ripple & Noise:	70mVrms
.Display accuracy:	±(0.5% Rdg + 2 digital)
.Input voltage:	85~265VAC 50/60Hz
.Dimensions:	110(W)×75(H)×140(D)mm
.Weight:	300g



S7-3001

S7-1206 [2 VOLTAGES]

Specifications

.Output voltage:	6V, 12V
.Output current:	6A
.Line regulation:	15mV
.Load regulation :	20mV
.Ripple & Noise:	1.5mVrms,5mVpp
.Output accuracy:	5%
.Input voltage:	85~265VAC 50/60Hz
.Dimensions:	110(W)×75(H)×140(D)mm
.Weight:	300g



S7-1206