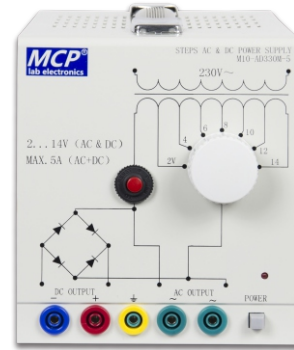


M10-AD330M-5**Features**

- . Both AC and DC output (full-wave rectification)
- . Working diagram on panel for easy operation
- . Output 2~14V in 7 steps
- . Over current protection
- . Transformer thermal protection

Specifications

- | | |
|---------------------------|---|
| . Output voltage: | 2V, 4V, 6V, 8V, 10V, 12V, 14V |
| . Output current: | Max. 5A (AC+DC) |
| . Output accuracy: | 10% |
| . Input voltage: | 220~240VAC ± 10%, 50Hz
or 110~127VAC ± 10%, 60Hz |
| . Dimensions (W x H x D): | 132 x 160 x 260mm |
| . Weight: | 3.5kg |

**M10-AD330M-5**